

PROJECT TYPE \_\_\_\_\_

BLE -            -            -            -            -            -            -            -           

**A** **B** **C** **D** **E** **F** **G**

           -           

**H** **I**

## A – MOUNTING STYLE

### B - SHADE & SHADE SIZE

### C - SHADE FINISH

100	Black
105	Textured Black
200	White
300	Dark Green
307	Emerald Green
311	Jadite
370	Mint
380	Chartreuse
390	Teal
400	Barn Red
420	Orange
470	Watermelon
480	Blush Pink
490	Magenta
500	Buttery Yellow
570	Sunflower
600	Bronze
601	Chocolate
605	Rust
615	Oil-Rubbed Bronze
700	Royal Blue
705	Navy
710	Cobalt Blue
715	Delphite Blue
800	Industrial Grey
805	Charcoal Granite
810	Graphite
975	Galvanized

995	Raw Copper
996	Weathered Copper
997	Raw Brass
998	Weathered Brass
999	Oil-Rubbed Copper

## D - MOUNTING

<b>SBK</b>	Standard Black
<b>SWH</b>	Standard White
<b>CSB</b>	Black Cloth
<b>CSW</b>	White Cloth
<b>CSR</b>	Red Cloth
<b>CSBB</b>	Black & Brown Cloth
<b>CSRW</b>	Red & White Cloth
<b>CSGW</b>	Gold & White Cloth
<b>CSBG</b>	Black & Gold Cloth
<b>CSBW</b>	Black & White Cloth
<b>CSBP</b>	Black & Pink Cloth
<b>CSUW</b>	Blue & White Cloth

<b>CBK</b>	Black Cotton
<b>CMG</b>	Grey Cotton
<b>CRZ</b>	Red Chevron
<b>TBK</b>	Black Cotton Twist <sup>2</sup>
<b>TWH</b>	White Cotton Twist <sup>2</sup>
<b>TBR</b>	Brown Cotton Twist <sup>2</sup>
<b>TRD</b>	Red Cotton Twist <sup>2</sup>
<b>TPT</b>	Putty Cotton Twist <sup>2</sup>
<b>TBW</b>	Black & White Twist <sup>2</sup>
<b>TRW</b>	Red & White Twist <sup>2</sup>
<b>TBB</b>	Brown & Beige Twist <sup>2</sup>

<b>ST506</b>	.5" Stem Mount, 6"
<b>ST512</b>	.5" Stem Mount, 12"
<b>ST518</b>	.5" Stem Mount, 18"
<b>ST524</b>	.5" Stem Mount, 24"
<b>ST536</b>	.5" Stem Mount, 36"
<b>ST548</b>	.5" Stem Mount, 48"
<b>ST706</b>	.75" Stem Mount, 6"
<b>ST712</b>	.75" Stem Mount, 12"
<b>ST718</b>	.75" Stem Mount, 18"
<b>ST724</b>	.75" Stem Mount, 24"
<b>ST736</b>	.75" Stem Mount, 36"
<b>ST748</b>	.75" Stem Mount, 48"

G1'	G16'
G2'	G17
G3'	G19'
G4	G22
G5'	G24
G6'	G25
G7	G26'
G8	G32
G9	G34'
G10	G35'

## D - MOUNTING (CONTINUED)

G11 <sup>1</sup>	G36 <sup>1</sup>
G12 <sup>1</sup>	G40 <sup>1</sup>
G13	G64 <sup>1</sup>
G14	G65 <sup>1</sup>
G15	

**FLUSH MOUNT OPTIONS:**  
**FM<sup>1</sup>**

## E - MOUNTING FINISH

**Please Note: See **Section C** for all applicable Mounting Finish Options**

**(I) If Cord Hung [C] Mounting Style,**  
selection identifies canopy finish

**(II) If Flush Mount [F] Mounting Style,**  
select NA

**(III) If Stem Mount [S] Mounting Style,**  
selection identifies stem and canopy finish

**(IV) If Gooseneck [G] Mounting Style,**  
selection identifies gooseneck and wall  
backing plate finish

**NA** Not Applicable

## F - GLASS OPTION

<b>CLR</b>	Clear Glass <sup>7</sup>
<b>FST</b>	Frosted Glass
<b>RIB</b>	Ribbed Glass
<b>CCR</b>	Clear Crackle Glass
<b>SMK</b>	Smoke Crackle Glass
<b>HCR</b>	Honey Crackle Glass

## G - MOUNTING ACCESSORY

<b>NA</b>	None/Not Applicable
<b>HSC</b>	Hang Straight Canopy <sup>1,3</sup>
<b>HDSMC</b>	Heavy Duty Stem Mount Canopy <sup>1</sup>
<b>HDBP</b>	Heavy Duty Backing Plate <sup>1,2</sup>
<b>DD</b>	Dusk-to-Dawn Photocell <sup>2</sup>
<b>DBPC</b>	Decorative Backing Plate Cover
<b>DCHX</b>	Decorative Backing Plate Cover & Hex Cover <sup>8</sup>

## H - LIGHT SOURCE

<b>E26</b>	100 Watt Max
<b>GU24</b>	24 Bi-Pin, 18W Max
<b>LED16.8</b>	16.8W LED, 1600 Lumen

## I - COLOR TEMPERATURE<sup>5</sup>


<b>NA</b>	Not Applicable
<b>2700K</b>	2700K, Warm White
<b>3000K</b>	3000K, Neutral White
<b>3500K</b>	3500K, Bright White
<b>4000K</b>	4000K, Cool White

Address: 320 Knox McRae Dr. Titusville, FL 32780      Phone: (800) 407-8784      Email: [sales@barnlight.com](mailto:sales@barnlight.com)      Website: [www.barnlight.com](http://www.barnlight.com)


MOUNTING STYLE

Galvanized steel shades are crafted from 20 Ga Sheet metal while 1100-0 Aluminum—ranging from 0.050" to 0.125"—is used for all other shades. All shades have their edges rolled, and the result is highly durable and stylish lighting.


CORD HUNG PENDANT (C)

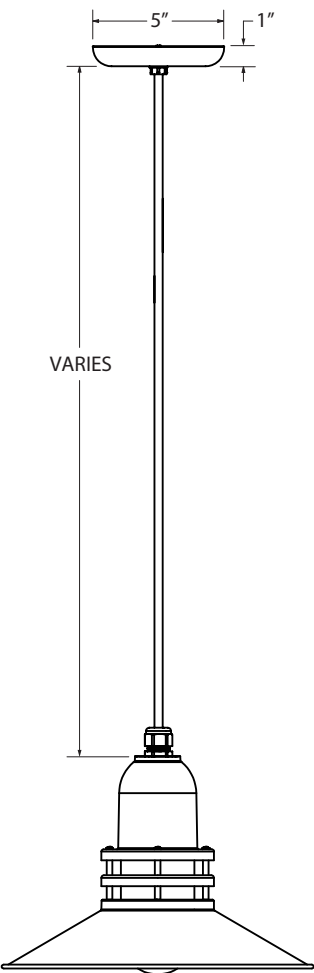


FLUSH MOUNT (F)



STEM MOUNT PENDANT (S)

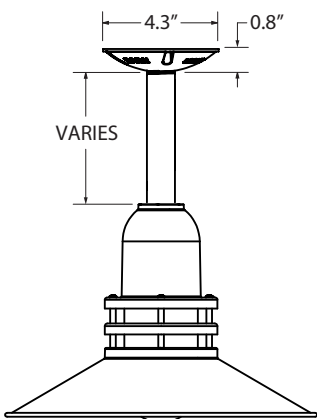


GOOSENECK (G)

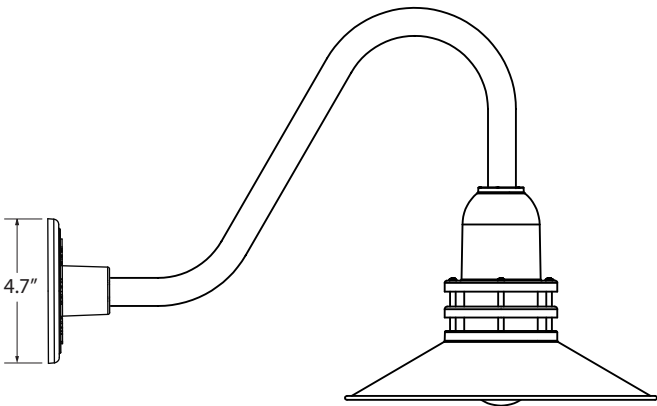

SHOWN WITH: G26 GOOSENECK ARM

AVAILABLE SHADE SIZES



SHADE CODE	HEIGHT (A)	DIAMETER (B)
ULC12	9.5"	12"
ULC14	10"	14"
ULC16	10.75"	16"
ULC18	11.25"	18"

**LIGHT SOURCE**

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. To obtain an IES file specific to your project, please contact the factory.

OPTION	WATTAGE	LUMENS <small>*Avg. value, actual value dependent on bulb used</small>	CRI	VOLTAGE	DIMMING
<b>INCANDESCENT (MED E26)</b>					
<b>E26</b>	100W Max	1400*	100	120 VAC	Bulb Dependant
<b>COMPACT FLOURESCENT (GU24 CFL)</b>					
<b>GU24</b>	18W Max	1400*	75	120 VAC	Bulb Dependant
<b>LED</b>					
<b>LED16.8</b>	16.8W	1600	>90	120 VAC	TRIAC

**SPECIFICATIONS****MOUNTING****STEM**

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Mounting Stem. Custom lengths available upon request.

**GOOSENECK**

1/2" Nominal (0.84" Actual) or 3/4" Nominal (1.05" Actual) Sch 40, 6063 Aluminum Gooseneck.

**SHADE & FINISHES****CHEROKEE UPLIGHT SHADE**

Hand-spun from high purity 0.050" thick 3003-O temper aluminum.

**POWDER COAT FINISHES**

Polyester powder coat finishes are electro-statically applied and thermocured.

**CERTIFICATIONS, LISTINGS & WARRANTY****MADE IN THE USA**

Manufactured and hand-crafted in our 60,000 square foot facility located in Titusville, FL.

**CSA LISTED FOR WET LOCATIONS**

Includes all Stem, Flush Mount and Gooseneck Mounting Styles.

**CSA LISTED FOR DAMP LOCATIONS**

Includes select Cord Hung Mounting Styles.

**LIMITED WARRANTY**

For additional information on our limited warranty, please see our Terms & Conditions.

**LED SPECIFICATIONS****LUMEN MAINTENANCE**

LED16.8 Source is L90(11K) > 61,000 Hours.

**COLOR TEMPERATURES**

Standard color temperatures available include 2700K, 3000K, 3500K and 4000K. Custom temperatures available upon request.

**CRI**

Minimum 90 CRI. Consult factory for other CRI options.

**EFFICACY**

Delivers over 95 Lumens per watt.

**DRIVER & DIMMING OPTION**

Reliant on Triac Dimming 16.8W / 120V, dimmable down to 1% depending on dimmer. Requires compatible dimming switch.